




RM Series DIN-RAIL Mounting Power Relay Modules I-950-ENC IP66 Industrial Enclosure

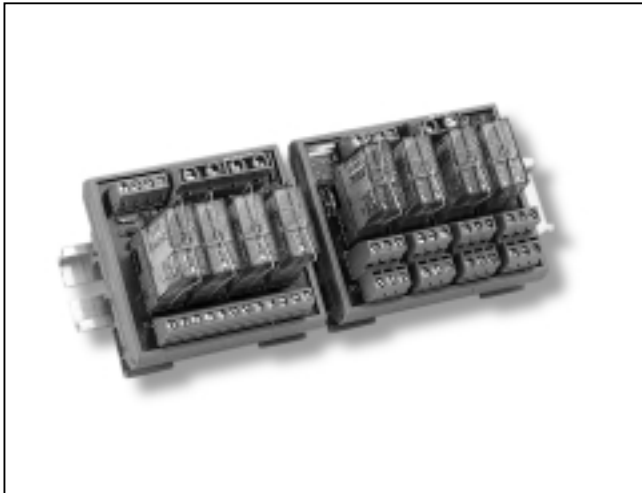

Functional Description

RM series relay modules are designed to be mounted on DIN RAIL TS-15, TS-32 or TS-35. RM-10X contains 1 form C relays, while RM-20X contains 2 form C relays. In order to prevent improper operation, reverse polarity protection is provided. A LED indicate the status of each channel. Those modules provide 4 channel relays, 8 channel relays and 16 channel relays version.

RM-10x series

Specifications

- Rated current for each relay : 16A
- Provide one N.C. and one N.O. for each channel
- Maxi. Peak current : 30A
- Maxi. Switching voltage : 400V AC
- Standard contact material : Ag Cd0
- Input Voltage : DC 24 V

RM-20x series

Specifications

- Rated current for each relay : 5A
- Provide two N.C. and two N.O. for each channel
- Maxi. Peak current : 10A
- Maxi. Switching voltage : 400V AC
- Standard contact material : Ag Nt
- Input Voltage : DC 24 V

Order Information

- RM-104: 4 channels power relay modules
- RM-108: 8 channels power relay modules
- RM-116: 16 channels power relay modules
- RM-204: 4 channels power relay modules
- RM-208: 8 channels power relay modules
- RM-216: 16 channels power relay modules

Introduction:

The I-950-ENC IP66 industrial enclosure is designed for use in industrial environments. It provides space for one or two I-7000 modules. It's rugged housing protect modules from Moisture , UV radiation ... etc.

Features

- Built-in DIN-RAIL for easy mounting
- Sidewall knockouts offer easy wire positioning
- Seal design provides anti-leak protection
- Dimension : 247 mm (width) x 180 mm (length) x 90mm (height)

Order Information

- I-950: IP66 Industrial Enclosure
- Includes
 - Case
 - Accessory
 - 2 x Polyamide cable glands
 - 4 x captive lid screws
 - 1 x DIN-rail (21cm)

